

Filed November 19, 1970

10:35 am

2nd 4

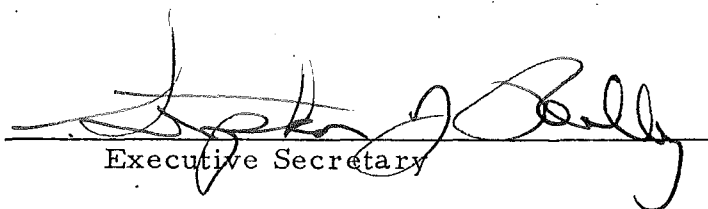
STATE OF WISCONSIN)
) SS
DEPARTMENT OF INDUSTRY,)
LABOR AND HUMAN RELATIONS)

TO ALL TO WHOM THESE PRESENTS SHALL COME, GREETINGS:

I, Stephen J. Reilly, Executive Secretary of the Department of Industry, Labor and Human Relations, and custodian of the official records of said Department, do hereby certify that the attached rules to Wisconsin Administrative Code Chapter Ind 4, Elevator, were adopted by the Department of Industry, Labor and Human Relations on November 11, 1970.

I further certify that said copy has been compared by me with the original on file in this Department and that the same is a true copy thereof and of the whole of such original.

IN TESTIMONY WHEREOF, I have hereunto set my hand and affixed the official seal of the Department at the Capitol, in the City of Madison, this 17 day of November, A. D., 1970.


Executive Secretary

ORDER OF

DEPARTMENT OF INDUSTRY, LABOR AND HUMAN RELATIONS

Pursuant to authority vested in the Department of Industry, Labor and Human Relations by section 101.01 to 101.29 Wis. Stats., the Department of Industry, Labor and Human Relations hereby amends, repeals, recreates and adopts Chapter 4 Elevator, Wisconsin Administrative Code.

The rules attached hereto shall become effective on the first day of the month following publication in the Wisconsin Administrative Code as provided in Section 227.

Subsection Ind 4.03 (1)(a) is amended to read:

(a) Belt, bucket, scoop, roller or similar inclined or vertical freight conveyors, tiering or piling machines when not serving more than the floor level on which the tiering or piling machine is located.

Subsection Ind 4.03 (1)(c) is amended to read:

(c) Mechanical lifts serving only the floor level on which the lift is located.

Section Ind 4.06 is amended to read:

Ind 4.06 Inspection fee. A charge in accordance with the fee schedule established by Wisconsin Adm. Code, chapter 69, Fee Schedule will be made by the department of industry, labor and human relations of each inspection of each elevator, power dumbwaiter, material handling elevator, moving walk or moving ramp, or escalator.

Section Ind 4.08 is amended to read:

Ind 4.08 Inspection by cities. In any city which provides a competent inspector, the department of industry, labor and human relations will accept inspections by such city, provided the conditions of subsections Ind 4.09 (2)(a), (b), (c), (d) and (e) are complied with, substituting "city" for "insurance company".

Subsection Ind 4.09 (1)(d) is amended to read:

(d) The insurance company shall use all reasonable diligence to secure compliance with the commission's rules. If unsuccessful, it shall so report to the department. If it then becomes necessary for the department to make an inspection, the statutory fee for each unit inspected will be charged. (See Wis. Adm. Code section Ind 4.06.)

Subsection Ind 4.09 (3), (4) and (5) is created to read:

(3) A certificate for operation will be issued by the department of industry, labor and human relations upon finding said equipment meeting the applicable safety standards covered in this code.

(a) Certificates shall be effective for one year following the date of issuance.

(4) The department may revoke the certificate for operation if said equipment is found to be in non-compliance with the applicable safety rules.

(5) Whenever the department under the authority of subsection Ind 4.09(4) revokes a certificate, the department shall immediately notify the owner, defined in subsection 101.01(13) Wis. Stats., of the equipment in writing and shall afford him an opportunity for a hearing within 30 days time after revocation of certificate.

Subsection Ind 4.18 (1) (Intro-par.) is amended to read:

(1) The minimum pit depth for every power elevator shall be not less than is required for the installation of buffers, compensating sheaves if any, and all other elevator equipment located therein, and to provide the minimum bottom clearance and runby as required by subsections Ind 4.18 (1)(c) and Ind 4.18 (1)(d).

Subsection Ind 4.21 (4)(d) is created to read:

(d) Access to the roof shall be by means of a stairway in compliance with subsection Ind 4.22 (4).

Subsection Ind 4.28 (6)(a) 1. is created to read:

1. The exit cover of every elevator hereafter installed shall open upward and shall be hinged or may be arranged to slide horizontally in guides fastened to the car top, and arranged to be opened from the top of the car only.

Subsection Ind 4.54 (1) (Intro-par.) is amended to read:

(1) Connections between members of car frames and platforms shall be riveted, bolted or welded and shall conform with the requirements outlined in this subsection. (Also see section Ind 4.52.)

Subsection Ind 4.54 (2) (Intro-par.) is amended to read:

(2) The design stresses in the car-frame and platform members and their connections based on the static load imposed upon them shall not exceed the stresses permitted by chapter 53, Wis. Adm. Code, chapters 50-59, Building and Heating, Ventilating and Air Conditioning.

Subsection Ind 4.57 (1) (Intro-par.) is amended to read:

(1) Guide rails shall be secured to their brackets by clips or by bolts which shall conform with subsections Ind 4.57 (1)(a) and (b) or by welding which shall conform with subsection Ind 4.52 (5).

DEPARTMENT OF INDUSTRY, LABOR AND HUMAN RELATIONS



Stephen J. Reilly, Executive Secretary

November 17, 1970