

## Chapter Ind 58

### HEALTH CARE, DETENTION AND CORRECTIONAL FACILITIES

- | Subchapter I<br>Health Care Facilities                               | Subchapter II<br>Detention and Correctional Facilities     |
|--|--|
| <b>SCOPE</b>   | <b>SCOPE</b>   |
| Ind 58.001 Scope (p. 214)  | Ind 58.40 Scope (p. 229)                                   |
| <b>GENERAL REQUIREMENTS</b>  | Ind 58.41 Definitions (p. 229)                             |
| Ind 58.01 Class of construction (p. 214)                             | Ind 58.42 Class of construction (p. 230)                   |
| Ind 58.02 Separation from other occupancies (p. 214)                 | Ind 58.43 Program support facilities (p. 230)              |
| Ind 58.03 Windows (p. 215)   | Ind 58.44 Separation from other occupancies (p. 230)       |
| <b>MEANS OF EGRESS REQUIREMENTS</b>                                  | Ind 58.45 Windows (p. 231)                                 |
| Ind 58.04 Required means of egress (p. 215)                          | Ind 58.46 Size of sleeping rooms (p. 231)                  |
| Ind 58.05 Number and type of exits (p. 216)                          | Ind 58.47 Sleeping rooms below grade (p. 231)              |
| Ind 58.06 Stairs (p. 216)  | <b>MEANS OF EGRESS REQUIREMENTS</b>                        |
| Ind 58.07 Handrails (p. 217)   | Ind 58.48 Required means of egress (p. 231)                |
| Ind 58.08 Guardrails (p. 217)  | Ind 58.49 Exit doors, number and type of exits (p. 232)    |
| Ind 58.09 Smokeproof towers (p. 217)                                 | Ind 58.50 Stairways (p. 232)                               |
| Ind 58.10 Horizontal exits (p. 217)                                  | Ind 58.51 Smokeproof towers (p. 232)                       |
| Ind 58.11 Ramps (p. 217)   | Ind 58.52 Horizontal exits (p. 232)                        |
| Ind 58.12 Capacity of means of egress (p. 218)                       | Ind 58.53 Ramps (p. 233)                                   |
| Ind 58.13 Arrangement of means of egress (p. 218)                    | Ind 58.54 Required exit width (p. 233)                     |
| Ind 58.14 Measurement of travel distance to exits (p. 219)           | Ind 58.55 Arrangement of means of egress (p. 233)          |
| Ind 58.15 Discharge from exits (p. 219)                              | Ind 58.56 Measurement of travel distance to exits (p. 233) |
| Ind 58.16 Illumination of means of egress (p. 219)                   | Ind 58.57 Illumination of means of egress (p. 234)         |
| Ind 58.17 Emergency lighting (p. 220)                                | Ind 58.58 Marking of means of egress (p. 234)              |
| Ind 58.18 Marking of means of egress (p. 220)                        | Ind 58.59 Door locks (p. 234)                              |
| Ind 58.19 Headroom (p. 220)  | <b>PROTECTION</b>  |
| Ind 58.20 Door locks (p. 220)  | Ind 58.60 Protection of openings (p. 235)                  |
| <b>PROTECTION</b>  | Ind 58.61 Protection of vertical openings (p. 235)         |
| Ind 58.21 Protection of openings (p. 220)                            | Ind 58.62 Isolation of hazards (p. 236)                    |
| Ind 58.22 Elevator lobby enclosures (p. 221)                         | Ind 58.63 Standpipes (p. 236)                              |
| Ind 58.23 Protection of vertical openings (p. 221)                   | Ind 58.64 Fire alarms (p. 236)                             |
| Ind 58.24 Protection from hazards (p. 221)                           | Ind 58.65 Automatic smoke detection system (p. 237)        |
| Ind 58.25 Rubbish chutes and laundry chutes (p. 222)                 | Ind 58.66 Interior finishes (p. 237)                       |
| Ind 58.26 Interior finish (p. 223)                                   | Ind 58.67 Smoke barrier (p. 237)                           |
| Ind 58.27 Detection, alarm and communication systems (p. 223)        | <b>SANITARY FACILITIES</b>                                 |
| Ind 58.28 Standpipes (p. 224)  | Ind 58.68 Sanitation requirements (p. 238)                 |
| Ind 58.29 Automatic sprinkler and other suppression systems (p. 224) | <b>GUARD TOWERS</b>  |
| Ind 58.30 Smoke barrier (p. 225)                                     | Ind 58.69 Guard towers and observation stations (p. 239)   |
| Ind 58.31 Construction of corridor walls (p. 226)                    |  |
| <b>SANITARY FACILITIES</b>   |  |
| Ind 58.32 Sanitation requirements (p. 228)                           |  |

## Subchapter I—Health Care Facilities

## SCOPE

**Ind. 58.001 Scope. GENERAL.** The provisions of this subchapter shall apply, on or after the effective date of this section, to the following:

(a) New health care facilities and additions to existing health care facilities;

(b) Alterations and remodeling affecting structural strength, fire hazard, natural lighting or replacement of major equipment. Alterations and remodeling do not include minor repairs necessary for the maintenance of any building or structure. Where buildings are being remodeled or altered, only those components or systems being remodeled or altered shall be made to conform with the rules in effect at the time the remodeling or alteration occurs; and

(c) Change of use where the requirements for the new use are more stringent than those for the previous use.

(2) **APPLICATION.** (a) The rules of this subchapter are not retroactive unless specifically stated in the individual administrative rule.

(b) The rules of this subchapter do not apply to alterations or remodeling of buildings, constructed prior to the effective date of this paragraph, being undertaken solely for the purpose of obtaining federal certification or state licensure.

(c) Where other sections of chs. Ind 50-64 specify different requirements than those contained in this subchapter, the requirements of this subchapter shall govern.

(3) **VARIANCE.** Where explicit conformance with the rules of this subchapter is not attained, the department will consider and may grant a variance as specified in s. Ind 50.25. The department will consider the results obtained from nationally recognized evaluation procedures (for example, Fire Safety Evaluation System (FSES) as specified in Appendix C of the National Fire Protection Association (NFPA) Life Safety Codes 101-1981) in evaluating requests for variance.

**Special Note:** The purpose of this subchapter is to eliminate conflicting rules between DILHR and DH&SS. DH&SS is involved with the enforcement of the federal requirements for the Title XVIII (Medicare) and Title XIX (Medicaid) programs. Since the basis of the federal program for construction purposes is compliance with the NFPA, 101 Life Safety Code, the rules of this subchapter reflect the rules of the NFPA, 101 Life Safety Code, 1981 edition.

**History:** Cr. Register, December, 1981, No. 312, eff. 1-1-82; cr. (2) (c), Register, October, 1982, No. 322, eff. 11-1-82.

## GENERAL REQUIREMENTS

**Ind. 58.01 Class of construction.** (1) **TWO OR MORE STORIES.** All health care facilities 2 or more stories in height shall be of fire-resistive type 1 construction as specified in s. Ind 51.03 (1) with the following modifications:

(a) *Floor framing support assemblies.* Floor framing support assemblies shall have a minimum fire-resistive rating of 3 hours.

Register, October, 1982, No. 322  
Building and heating, ventilating  
and air conditioning

(b) *Roof assemblies.* Roof assemblies shall have a minimum fire-resistive rating of 1½ hours.

(c) *Exterior bearing walls.* All exterior bearing walls shall have a minimum fire-resistive rating of 3 hours.

(2) **ONE STORY CONSTRUCTION.** (a) *Hospitals.* One story hospitals shall be of type 3 metal frame protected construction or better as specified in Table 51.03-A with the following specifications:

1. Roof framing assemblies for types 1, 2 and 3 construction shall have a minimum fire-resistive rating of one hour.

2. All exterior bearing walls of type 3 construction shall have a minimum fire-resistive rating of one hour.

(b) *Nursing homes.* One story nursing homes shall be of type 7 wood frame protected construction or better as specified in Table 51.03-A.

**History:** Cr. Register, December, 1981, No. 312, eff. 1-1-82; am. (2) (a) 2., Register, October, 1982, No. 322, eff. 11-1-82.

**Ind 58.02 Separation from other occupancies.** (1) **OCCUPANCY SEPARATIONS.** Occupancies not within the scope of this subchapter built in connection with any health care facility, shall be separated from any such health care facility by at least 2-hour fire-resistive rated construction as specified in s. Ind 51.04, except as provided in subs. (2) and (3). Auditoriums, chapels, residential facilities and other similar areas provided for the patients or employes of health care facilities, need not be separated with rated construction, but shall comply with the exiting requirements of chs. Ind 54-62, as appropriate.

(2) **OUTPATIENT SERVICES.** Doctor's offices, medical clinics and similar facilities which are primarily intended to provide outpatient services will be classified as a ch. Ind 54 occupancy provided the facilities are separated from health care occupancies by not less than 2-hour fire-resistive rated construction. Class of construction separations shall comply with s. Ind 51.02 (20).

(3) **GARAGES.** (a) Storage garages and repair garages shall be separated from health care facilities as specified in s. Ind 59.22.

(b) Areas accommodating emergency vehicles for temporary loading or unloading purposes need not be separated from health care facilities. The storage or repair of the vehicles is prohibited in these areas.

(4) **OPENINGS.** All openings in occupancy separations shall occur only in corridors and shall be protected by self-closing fire-resistive door assemblies as specified in s. Ind. 58.21.

**History:** Cr. Register, December, 1981, No. 312, eff. 1-1-82; am. (3) (a), Register, October, 1982, No. 322, eff. 11-1-82.

**Ind 58.03 Windows.** (1) **OUTSIDE WINDOWS.** Every habitable room shall be provided with outside windows having a total sash area of at least 8% of the floor area of the room. The bottom of the window opening in sleeping rooms, shall be not more than 36 inches above the floor.

(2) **VENTILATION.** (a) *Where required.* Every patient sleeping room and every habitable room shall have an outside window or outside door

Register, October, 1982, No. 322  
Building and heating, ventilating  
and air conditioning

located so it can be opened from the inside to permit the venting of products of combustion and to permit any occupant to have direct access to outside air in case of an emergency. Where windows require the use of tools or keys for operation, written approval from the department shall be obtained. The keys or tools shall be accessible to staff and located on each floor having such windows.

(b) *Openable area of outside windows.* The openable area of outside windows shall be equal to at least 4% of the floor area served, except as follows:

1. Rooms intended for occupancy for less than 24 hours, such as those housing obstetrical labor beds, recovery beds, observation beds in emergency department and newborn nurseries;
2. Rooms where persons are forcibly confined, such as psychiatric wards, alcohol and drug abuse areas or other similar areas of protective placement; or
3. Buildings designed with an engineered smoke control system as specified in NFPA 90A, Standard for the Installation of Air Conditioning and Ventilating Systems.

*History:* Cr. Register, December, 1981, No. 312, eff. 1-1-82; am. (1) and (2) (a), Register, October, 1982, No. 322, eff. 11-1-82.

#### MEANS OF EGRESS REQUIREMENTS

**Ind 58.04 Required means of egress.** (1) **GENERAL.** All required means of egress shall comply with the requirements as specified in s. Ind 51.15, except as modified in this section.

(2) **EXIT DOORS.** (a) *Width.* All exit doors shall be not less than 44 inches and not more than 48 inches in width, except that doors serving enclosed stairways may be a minimum of 36 inches in width.

(b) *Door swing.* A door which is used by 25 persons or less shall not be required to open in the direction of egress.

(c) *Force to open door.* The force required to fully open doors shall not exceed 37 pounds applied to the latch side.

(d) *Door platforms.* The floor on both sides of an exit door, except as specified in s. Ind 51.16 (4) (c), shall be at the same elevation and be level for a distance at least the width of the door, or as specified in s. Ind 52.04 (9) (b).

(3) **EXIT ACCESS DOORS.** (a) *Width.* 1. All exit access doors from hospital and nursing home sleeping rooms; diagnostic and treatment areas, such as x-ray, surgery, or physical therapy; and all doors between these spaces and the required exits shall be at least 44 inches wide.

2. Exit access doors not subject to use by patients, shall be at least 36 inches wide.

(b) *Door swing.* A door which is used by not more than 25 persons shall not be required to open in the direction of egress.

*History:* Cr. Register, December, 1981, No. 312, eff. 1-1-82; am. (2) (b), Register, October, 1982, No. 322, eff. 11-1-82.

Register, October, 1982, No. 322  
Building and heating, ventilating  
and air conditioning

**Ind 58.05 Number and type of exits.** (1) **NUMBER.** At least 2 exits, located remote from each other, shall be provided from each floor and fire section of the building.

(2) **TYPE OF EXITS.** (a) At least one exit from each floor or smoke compartment shall be by a door leading directly to a stairway, smokeproof tower, ramp, horizontal exit, exit passageway, or to the outside the building as specified in this subchapter.

(b) No more than one-half of the required exits shall be horizontal exits.

**History:** Cr. Register, December, 1981, No. 312, eff. 1-1-82.

**Ind 58.06 Stairs.** (1) **STAIR DETAILS.** All stairs shall comply with the requirements specified in ss. Ind 51.16 and 51.164, except as modified in this section.

(a) All stairways and steps shall be so designed that the sum of 2 risers and a tread, exclusive of its nosing or projection, shall be not less than 24 inches or more than 25 inches, with a tread not less than 11 inches. Treads of stairs shall be solid.


(b) Every landing or platform shall be at least as wide as the stairway, measured at right angles to the direction of travel. The length of every landing or platform shall be at least as wide as the stairway. The length of the landing or platform need not exceed 48 inches.

(c) The aggregate width for stairways shall comply with the requirements specified in s. Ind 58.12.

(2) **ENCLOSURE.** (a) All stairways shall be enclosed as specified in s. Ind 51.18.

(b) Stairways in addition to those required by these rules, need not lead to the outside, but shall comply with the enclosure requirements.

**History:** Cr. Register, December, 1981, No. 312, eff. 1-1-82; am. (1) (a) and (2) (a), Register, October, 1982, No. 322, eff. 11-1-82.

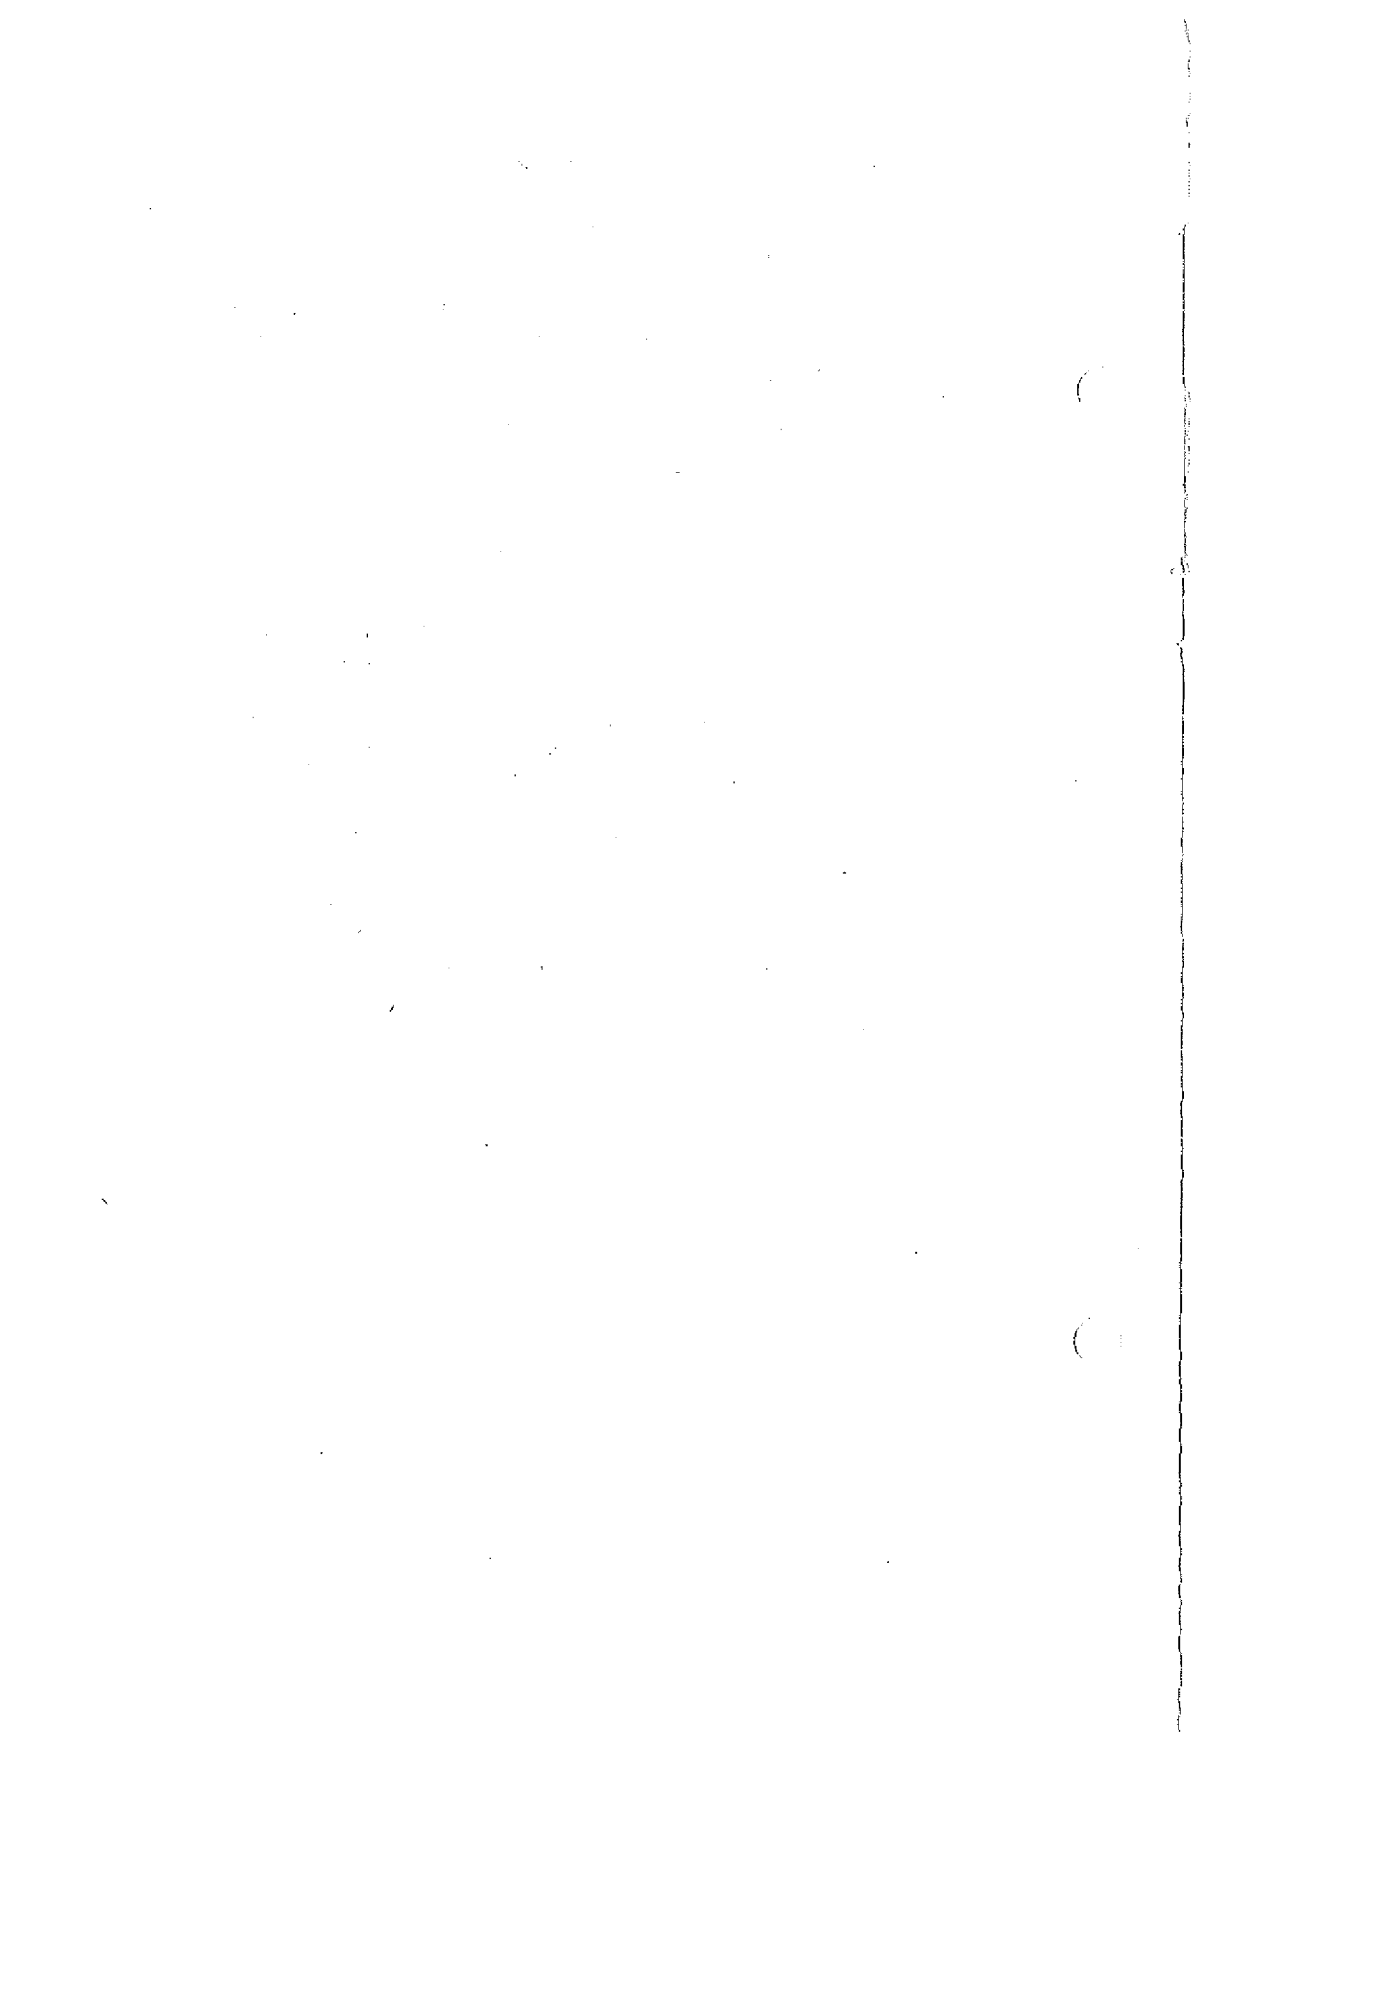

c. Complete automatic sprinkler system or fire detection system, if provided.

**History:** Cr. Register, December, 1981, No. 312, eff. 1-1-82.

**Ind 58.22 Elevator lobby enclosures.** All elevator lobbies shall be enclosed with at least one-hour fire-resistive construction as specified in s. Ind 51.04, to limit the spread of smoke and fire. All openings shall be protected with fire-rated door assemblies specified in s. Ind 58.21.

**History:** Cr. Register, December, 1981, No. 312, eff. 1-1-82.

**Ind 58.23 Protection of vertical openings. (1) INTERIOR SHAFTS.** Every elevator shaft, dumbwaiter shaft, pipe shaft and other similar vertical shaft in buildings, shall be enclosed as specified in Table 51.03-A, except as provided in pars. (a) and (b):

(a) One-hour rated enclosures are permitted in hospitals of type 3 construction; or

(b) Duct penetrations of floor assemblies which are protected as specified in NFPA 90A, Standard for the Installation of Air Conditioning and Ventilating Systems.

(2) ESCALATORS. All escalators shall be enclosed as specified in s. Ind 58.06 (2).

**History:** Cr. Register, December, 1981, No. 312, eff. 1-1-82; am. (1) (intro.), Register, October, 1982, No. 322, eff. 11-1-82.

**Ind 58.24 Protection from hazards. (1) ENCLOSURES.** All hazards listed in Table 58.24-A shall be enclosed from other areas of the building with fire-resistive rated construction as specified in Table 58.24-A. All openings shall be protected with self-closing fire-rated assemblies specified in s. Ind 51.047.

**TABLE 58.24-A**

HAZARDS	FIRE-RESISTIVE RATING IN HOURS	
	Bldgs 3 Stories or Less <sup>1</sup>	Bldgs Over 3 Stories
Boilers (including fuel room and breeching)	2	3
Furnaces (including fuel room and breeching)	2	3
Laundries and drying rooms	2	3

<sup>1</sup>The minimum houring ratings specified may be reduced by one hour in buildings less than 3 stories in height and protected by an automatic sprinkler system. The minimum rating shall not be less than one hour.

(2) SEPARATIONS. All hazards listed in Table 58.24-B shall be vertically separated from other areas of the building with fire-resistive rated construction as specified in Table 58.24-B. All openings shall be protected with self-closing fire-rated assemblies specified in s. Ind 51.047.

Register, October, 1982, No. 322  
 Building and heating, ventilating  
 and air conditioning

TABLE 58.24-B

HAZARDS	FIRE RESISTIVE RATING IN HOURS <sup>1</sup>
†Soiled Linen Rooms	1
Kitchens	1
Handicraft Shops	1
†Carpenter Shops	1
Repair Shops	1
†Paint Shops	1
†Trash Collection Rooms	1
†Storage Rooms (containing quantities of flammable or combustible material exceeding 1 lb. of material per square foot of floor area)	1
Gift Shops	1
Laboratories (containing quantities of flammable or combustible material exceeding 1 lb. of material per square foot of floor area)	1
-All other laboratories	1
Employee Locker Rooms	1

† These areas are required to be protected with an automatic sprinkler system in addition to the fire-resistive enclosure requirements specified in the table.

<sup>1</sup> The minimum hourly ratings specified may be reduced by one hour in buildings protected by an automatic sprinkler system. The separation shall be not less than a smoke separation with a self-closing door.

History: Cr. Register, December, 1981, No. 312, eff. 1-1-82; am. Table 58.24-B, Register, October, 1982, No. 322, eff. 11-1-82.

**Ind 58.25 Rubbish chutes and laundry chutes.** (1) **VERTICAL PROTECTION.** Any rubbish chute or laundry chute shall be enclosed with walls or partitions of at least 2-hour fire-resistive construction specified in s. Ind 51.043, except that horizontal portions of pneumatic rubbish and laundry chute systems need not be enclosed. All openings shall be protected with self-closing fire-rated assemblies specified in s. Ind 51.047 and shall include the opening from the chute into the collection room.

(a) All rubbish chutes may discharge into trash collecting rooms, which are used for no other purpose and are enclosed as specified in Table 58.24-B. The incinerator shall not be directly flue-fed nor shall any floor discharging chute directly connect with the combustion chamber.

(b) All laundry chutes shall discharge into laundry rooms or laundry collecting rooms, which are used for no other purpose and are enclosed as specified in Tables 58.24-A and 58.24-B.

Register, October, 1982, No. 322  
Building and heating, ventilating  
and air conditioning



(2) **SPRINKLER PROTECTION.** All rubbish chutes or laundry chutes, including pneumatic rubbish and laundry systems, shall be provided with automatic sprinkler protection specified in s. Ind 51.23.

(3) **FIRE DAMPERS.** Fire dampers are required where chutes penetrate 2-hour or better fire-rated floor or wall systems in a horizontal run.

**History:** Cr. Register, December, 1981, No. 312, eff. 1-1-82; am. (1) (a) and (b), Register, October, 1982, No. 322, eff. 11-1-82.

**Ind 58.26 Interior finish.** (1) **SCOPE.** The requirements of this section apply to the interior finishes and surfaces of a building.

**Note:** See s. Ind 51.06 for specific requirements pertaining to foam plastics.

(2) **WALLS AND CEILINGS.** All walls and ceilings shall be Class A as specified in s. Ind 51.01 (75a).

(a) **Materials.** Materials such as carpeting having a napped, tufted, looped, or similar surface, when applied on walls or ceilings, shall meet the requirements of Class A interior finish, except as provided in par. (b).

**Note:** See ch. Ind 4 for interior finish for elevator cabs.

(b) **Exceptions.** 1. Walls and ceilings of individual rooms having a capacity of not more than 4 persons may have a Class B interior finish as specified in s. Ind 51.01 (75a).

2. Interior finish not in excess of 10 percent of the aggregate wall and ceiling areas of any room or space may be Class C materials in occupancies where interior finish of Class A or Class B is required.

(3) **FLOORS.** All interior finishes of floor materials shall be Class I or better as specified in s. Ind 51.01 (75a).

(a) **Tongue and groove wood flooring.** Tongue and groove wood flooring, one-half inch thick or greater, shall be permitted.

(b) **Floor material.** Floor material such as carpeting, shall be fire tested with the underlayment used and shall comply with the requirements as specified in ASTM E648-78, Test for Criteria Radiant Flux of Floor Covering Systems Using a Radiant Heat Source.

(4) **FIRE RETARDANT PAINTS OR SOLUTIONS.** Fire retardant paints or surface applied solutions shall not be used to satisfy the requirements of this section.

**History:** Cr. Register, December, 1981, No. 312, eff. 1-1-82.

**Ind 58.27 Detection, alarm and communication systems.** (1) **GENERAL.** All required detection and signaling devices and systems shall comply with the requirements of this section.

(a) All such systems shall be tested at least once a week and a record of such tests shall be kept. All system components or equipment shall be restored to normal condition promptly after each test or alarm and shall be maintained in an operable condition.

(b) The system shall be so arranged that the operation of any one station will actuate all devices connected to the system.

Register, October, 1982, No. 322  
Building and heating, ventilating  
and air conditioning

(c) A signaling system may be arranged to automatically perform local, incidental control functions to make the premises safer in the event of fire or to make it possible to hear alarm signals. The performance of incidental control functions, such as the release of self-opening or self-closing doors, shutting off supplies of gas, fuel oil, or electrical power, switching on emergency lights, switching off air supply ventilating fans, and other similar functions, shall not in any way impair the effective response of all required alarm indicating devices. The performance of incidental control functions shall not interfere with the power for lighting or for operating elevators.

(2) **FIRE ALARMS.** Every building shall have a manually operated fire alarm system as specified in s. Ind 51.24 and shall comply with the following requirements:

(a) The operation of any fire alarm activating device shall automatically, without delay, accomplish general alarm indication and control functions as specified in sub. (1). Zoned, coded systems may be used.

(b) The fire alarm system shall be arranged to transmit an alarm automatically to the fire department required to serve the area in which the health care facility is located, by the most direct and reliable method approved by local regulations.

(3) **AUTOMATIC SMOKE DETECTION SYSTEM.** (a) An approved automatic smoke detection system shall be installed in all corridors in nursing homes. Such systems shall be installed and maintained as specified in NFPA 72E but in no case shall smoke detectors be spaced more than 30 feet apart on center or more than 15 feet from any wall. All automatic smoke detection systems required by this section shall be electrically interconnected to the fire alarm system.

(b) Corridor smoke detection systems are not required on the patient sleeping room floors, where each patient sleeping room is protected by an approved smoke detection system.

(4) **FIRE EXTINGUISHERS.** Portable fire extinguishers shall be provided and maintained as specified in s. Ind 51.22.

History: Cr. Register, December, 1981, No. 312, eff. 1-1-82.

**Ind 58.28 Standpipes.** (1) **FIRST-AID STANDPIPES.** First-aid standpipes shall be provided as specified in s. Ind 51.21 for all health care facilities, unless an approved automatic sprinkler system is installed.

(2) **FIRE DEPARTMENT STANDPIPES.** Fire department standpipes shall be provided in all buildings exceeding 60 feet in height and shall comply with the requirements specified in s. Ind 51.21.

History: Cr. Register, December, 1981, No. 312, eff. 1-1-82.

**Ind 58.29 Automatic sprinkler and other suppression systems.** Automatic sprinkler systems shall comply with the requirements specified in s. Ind 51.23, except as modified in this section.

(1) **WHERE REQUIRED.** (a) *Hospitals.* Automatic sprinkler systems shall be provided as specified in ss. Ind 52.01 and 58.24.

Register, October, 1982, No. 322  
Building and heating, ventilating  
and air conditioning

(b) *Nursing homes.* A complete automatic sprinkler system shall be provided in all nursing homes constructed after the effective date of this rule.

(2) **SPRINKLER CONTROL VALVES.** (a) The main sprinkler control valves shall be electrically supervised so that at least a local alarm will sound at a constantly attended location where the valve is closed.

(b) All valves other than the main sprinkler control valve shall be electrically supervised or secured with a key locking device.

(3) **WATER FLOW SWITCH.** The water flow alarm switch for the automatic sprinkler system shall be electrically interconnected with the fire alarm system.

(4) **PARTIAL AUTOMATIC SPRINKLER SYSTEM.** The sprinkler piping serving no more than 6 sprinklers for any isolated hazardous area, may be connected directly to a domestic water supply system having a capacity sufficient to provide 0.15 gallons per minute per square foot of floor area throughout the entire enclosed area.

(a) *Indicating shut-off valve.* An indicating shut-off valve shall be installed in an accessible location between the sprinklers and the connection to the domestic water supply.

(b) *Water flow detection.* Where more than 2 sprinklers are installed in a single area, water flow detection shall be provided to sound the building fire alarm system in the event of sprinkler operation.

(5) **OTHER AUTOMATIC SUPPRESSION SYSTEMS.** (a) *Types.* Other automatic suppression systems such as, but not limited to, carbon dioxide, dry chemical, foam and Halon 1301, may be installed in lieu of an automatic water sprinkler system in any occupancy where the extinguishment or control of fire may be more effectively accomplished by this type of automatic suppression system.

(b) *Activation.* These suppression systems shall be installed such that the fire alarm system will sound when the suppression system is activated.

History: Cr. Register, December, 1981, No. 312, eff. 1-1-82.

**Ind 58.30 Smoke barrier.** (1) **DEFINITION.** A smoke barrier is a separation wall which is continuous from outside wall to outside wall and from floor slab to the underside of the floor slab or roof slab above, including all concealed spaces such as those found above a ceiling including interstitial spaces.

(2) **FIRE-RESISTIVE RATING.** Smoke barriers shall have a one-hour fire-resistive rating specified in s. Ind 51.043.

(3) **WHERE REQUIRED.** Smoke barriers are required to:

(a) Limit the area on any story to a length and width of not more than 150 feet;

(b) Divide every story into at least 2 compartments; and

(c) Enclose elevator lobbies on each floor.

Register, October, 1982, No. 322  
Building and heating, ventilating  
and air conditioning

(4) **DOORS.** (a) Corridor openings in smoke barriers shall be protected by a pair of swinging doors, each door to swing in a direction opposite from the other. Each door shall have a minimum width of 44 inches, except corridor openings in areas not intended for the housing, treatment, or use of patients may be protected by a single door having a minimum width of 36 inches.

(b) Doors in smoke barriers shall be self-closing and have at least a 20 minute fire-resistive rating, except doors may be held open as specified in s. Ind 58.21.

(c) Door louvers and grills are prohibited. Doors may be undercut to a maximum of  $\frac{3}{4}$  inches.

(d) A vision panel complying with the requirements of s. Ind 51.048 and not exceeding 1,296 square inches in area, shall be provided in each door in a smoke barrier and shall be set in steel frames. The bottom of the vision panel shall be located not more than 40 inches off the floor.

(e) Rabbets, levels, or astragals are required at the meeting edges, and stops are required on the head and sides of door frames. Positive latching hardware is not required.

(f) Center mullions are prohibited.

(5) **DAMPERS.** An approved damper designed to resist the passage of smoke shall be provided at each point a duct penetrates a smoke barrier. The damper shall close upon detection of smoke by an approved smoke detector, located within the duct except that:

(a) The approved damper, if located above a smoke barrier door, may be arranged to close upon detection of smoke by the local device designed to detect smoke on either side of the smoke barrier door opening.

(b) Buildings designed with an engineered smoke control system as specified in NFPA 90A, Standard for the Installation of Air Conditioning and Ventilating Systems, need not comply with this requirement.

(6) **VISION PANELS.** (a) Except as provided in par. (b), fixed wire glass vision panels shall be permitted in smoke barrier walls, provided the vision panels do not exceed 1,296 square inches in area. The vision panels shall have bolted steel frames and the glazing material shall be listed by an approved testing laboratory.

(b) Vision panels shall not be restricted in area and in fire resistance of glass or frames in buildings equipped throughout with an approved automatic extinguishing system.

History: Cr. Register, December, 1981, No. 312, eff. 1-1-82.

**Ind 58.31 Construction of corridor walls.** (1) **FIRE-RESISTIVE RATING.** Except as otherwise provided in this section, corridors shall be separated from all other areas by partitions which are continuous from the floor slab to the underside of the roof or floor slab above, through any concealed spaces such as those above suspended ceilings, and through interstitial structural and mechanical spaces, and shall have at least a one-hour fire-resistive rating as specified in s. Ind 51.043.

Register, October, 1982, No. 322  
Building and heating, ventilating  
and air conditioning

(a) In health care facilities equipped throughout with an approved automatic extinguishing system, a corridor may be separated from all other areas by nonfire-rated partitions, and where suspended ceilings are provided, the partitions may be terminated at the suspended ceiling.

(b) Corridor partitions may terminate at ceilings which are not an integral part of a floor construction if there is at least 5 feet of space between the top of the ceiling subsystem and the bottom of the floor or roof above provided:

1. The ceiling is of membrane type with a finish rating of 15 minutes;
2. Corridor partitions form smoke-tight joints with the ceilings (joint filler, if used, must be noncombustible);
3. Each compartment of interstitial space which constitutes a separate smoke area is vented, in case of smoke emergency, to the outside by mechanical means having a capacity to provide at least 2 air changes per hour, but in no case having a capacity less than 5,000 cfm;
4. The interstitial space shall not be used for storage; and
5. The space shall not be used as a plenum for supply, exhaust or return air except as provided in subd. 3.

(c) Waiting areas on a patient sleeping floor may be open to the corridor, provided:

1. The area does not exceed 250 square feet;
2. The area is located to permit direct supervision by the facility staff;
3. The area is equipped with an electrically supervised automatic smoke detection system installed as specified in s. Ind 58.27; and
4. Not more than one such waiting area is permitted in each smoke compartment.

(d) Waiting areas on floors other than institutional sleeping floor may be open to the corridor, provided:

1. Each area does not exceed 600 square feet;
2. The area is located to permit direct supervision by the facility staff;
3. The area is arranged not to obstruct any access to required exits;
4. The area is equipped with an electrically supervised, automatic smoke detection system installed as specified in s. Ind 58.27.

(e) Buildings equipped throughout with an approved automatic sprinkler system may have spaces open to the corridor which are unlimited in size provided:

1. The spaces are not used for patient sleeping rooms, treatment rooms or hazardous areas;
2. Each space is located to permit direct supervision by the facility staff;

3. The space and corridors which the space opens onto in the same smoke compartment are protected by an electrically supervised automatic smoke detection system installed as specified in s. Ind 58.27; and

4. The space is arranged not to obstruct access to required exits.

(f) Space for doctors' and nurses' charting, communications, and related clerical areas may be open to the corridor.

(2) VISION PANELS. (a) Fixed wire glass vision panels shall be permitted in corridor walls provided they do not exceed 1,296 square inches in area and comply with the requirements specified in s. Ind 51.048.

(b) Vision panels shall not be restricted in area and in fire resistance of glass or frames in buildings equipped throughout with an approved automatic extinguishing system.

(3) DOORS. Except as otherwise provided in this subsection, doors protecting corridor openings, other than required enclosures of exits or hazardous areas, shall have a 20-minute fire-resistive rating and be provided with latches. Fixed wire glass vision panels installed in these doors shall not exceed 720 square inches in area and shall be mounted in approved steel frames.

(a) In buildings equipped with a complete approved automatic sprinkler system:

1. Such doors and frames are not required to have a fire-resistive rating, but shall be constructed to resist the passage of smoke;

2. Such doors are provided with latches of a type suitable for keeping the door tightly closed; and

3. There is no restriction on the area of vision panels in these doors, the vision panels do not need to be wired, and there is no restriction in the type of frames.

(b) Door closing devices are not required on doors in corridor wall openings, other than those exits or required enclosures of hazardous areas.

(c) Labeled door frames are not required on openings other than those serving exits or required enclosures of hazardous areas, providing the door frames and stops are of steel construction.

(d) Doors to toilet rooms, bathrooms, shower rooms, sink closets, and similar auxiliary spaces which do not contain flammable or combustible materials need not comply with this section.

(4) TRANSFER GRILLS. Transfer grills shall not be used in these walls or doors, except doors to toilet rooms, bathrooms, shower rooms, sink closets and similar auxiliary spaces which do not contain hazardous quantities of flammable or combustible materials may have ventilating louvers or may be undercut.

History: Cr. Register, December, 1981, No. 312, eff. 1-1-82.

Register, October, 1982, No. 322  
Building and heating, ventilating  
and air conditioning

**SANITARY FACILITIES**

**Ind 58.32 Sanitation requirements.** (1) **TOILET ROOMS.** Every building included under the scope of this subchapter shall be provided with separate toilet rooms for each sex, and shall comply with the requirements specified in this section and ss. Ind 52.50 to 52.62.

(2) **PATIENTS.** The number of fixtures required for each sex shall comply with the ratios specified in Table 58.32.

(3) **EMPLOYEES.** The number of fixtures for employes shall comply with the requirements specified in Table 54.12-B and s. Ind 52.04 (4) and (8).

(4) **GENERAL PUBLIC.** The number of fixtures for the general public shall comply with the requirements specified in Table 54.12-A and s. Ind 52.04 (4) and (8).

**Note:** See ch. H 24—General and Special Hospitals, and ch. H 32—Nursing Homes, Wis. Adm. Code, for special requirements and locations for water closets, lavatories and bathing facilities.

**TABLE 58.32**

Type of Occupancy	Type of Fixture			
	Water Closets (WC)	Lavatories (L)	Bathtubs or Showers	Drinking Facilities (DF)
Health Care Facilities	1 (WC) per 2 patient rooms and not more than 4 beds	1 (L) per 2 patient rooms, not more than 4 persons per (L)	Nursing Homes 1 for each 20 persons or fraction thereof Hospitals 1 for each 15 patients or fraction thereof	1 (DF) for each 100 persons

**History:** Cr. Register, December, 1981, No. 312, eff. 1-1-82.

**Subchapter II  
 Detention and Correctional Facilities**

**SCOPE**

**Ind 58.40 Scope.** The requirements of this subchapter shall apply to all detention and correctional facilities, constructed on or after the effective date of this subchapter.

**History:** Cr. Register, December, 1981, No. 312, eff. 1-1-82.

**Ind 58.41 Definitions.** For the purpose of this subchapter, the following terms are defined:

(1) "Borrowed light" means an opening in an interior partition which provides natural light to an interior space.

(2) "Dayroom" means any room used as a group activity space and located contiguous to the sleeping rooms.

Register, October, 1982, No. 322  
 Building and heating, ventilating  
 and air conditioning

(3) "Detention and correctional facilities" means any building or part of a building used for purposes such as jails, detention centers, correctional institutions, reformatories, houses of correction, pre-release centers, and other residential care facilities where occupants are forcibly confined.

(4) "Holding room" means any room used for confining persons for the purpose of booking, court appearances and similar type functions.

(5) "Program support facility" means any detention or correctional facility, other than sleeping areas, containing only those facilities such as schools, theaters, assembly halls, shops, gyms, offices, medical facilities, food service and dining facilities, laundries, gatehouses and other similar facilities, where the occupancy of these areas is primarily residents or detention staff or both.

(6) "Smoke barrier" means a separation wall which extends continuously from outside wall to outside wall and from the floor to the underside of the floor slab or roof slab above, including all concealed spaces such as those found above a ceiling including interstitial spaces.

(7) "Smoke compartment" means a space within a building enclosed by smoke barriers on all sides.

(8) "Security vestibule" means a compartment provided with 2 or more doors with the intended purpose to prevent the continuous and unlimited passage by allowing the release of only one door at a time.

History: Cr. Register, December, 1981, No. 312, eff. 1-1-82.

#### GENERAL REQUIREMENTS

**Ind 58.42 Class of construction.** (1) **BUILDINGS OR PORTIONS OF BUILDINGS WITH SLEEPING ROOMS.** All detention and correctional facilities containing sleeping facilities shall be at least type 2 construction as specified in s. Ind 51.03.

(2) **PROGRAM SUPPORT FACILITIES.** All program support facilities shall be constructed in accordance with the following:

(a) *One-story building.* All buildings one-story in height shall be at least type 6, totally non-combustible construction as specified in s. Ind 51.03.

(b) *Two-stories or more in height.* All buildings 2-stories or more in height shall be at least type 2 construction as specified in s. Ind 51.03.

History: Cr. Register, December, 1981, No. 312, eff. 1-1-82.

**Ind 58.43 Program support facilities.** All program support facilities shall comply with the specific occupancy chapter requirements as specified in chs. Ind 54 to 62, except as modified in ss. Ind 58.59 and 58.64.

History: Cr. Register, December, 1981, No. 312, eff. 1-1-82.

**Ind 58.44 Separation from other occupancies.** (1) **OCCUPANCY SEPARATION.** Occupancies not within the scope of this subchapter, built in connection with any detention or correctional facility shall be separated from any such detention or correctional facility by at least 2-hour fire-resistive rated construction as specified in s. Ind 51.04. Auditoriums,

Register, October, 1982, No. 322  
Building and heating, ventilating  
and air conditioning



chapels, dining rooms, residential facilities and other similar areas provided for the residents need not be separated with rated construction. Class of construction separations shall comply with s. Ind 51.02 (20).

(2) **GARAGES.** (a) Storage garages and repair garages shall be separated from detention and correctional facilities as specified in s. Ind 59.22.

(b) Areas accommodating vehicles for the purpose of loading or unloading persons or material need not be separated from detention and correctional facilities. Storage or repair of the vehicles is prohibited in the loading and unloading areas, unless the type of construction meets the requirements for a garage.

(3) **PROTECTION OF OPENINGS.** All openings in occupancy separations shall be protected by self-closing fire-resistive door assemblies as specified in s. Ind 58.60.

History: Cr. Register, December, 1981, No. 312, eff. 1-1-82; am. (2) (a), Register, October, 1982, No. 322, eff. 11-1-82.

**Ind 58.45 Windows.** (1) **NATURAL LIGHTING.** Every sleeping room, except holding rooms where residents are detained for a time period not to exceed 72 hours, shall be provided with natural light. The natural light may be provided directly to the sleeping room by windows or sky lights or may be transferred indirectly to the space through the use of horizontal lights. The natural light shall be provided through either clear or translucent glazing with the area of the sash being at least 8% of the floor area served.

(2) **VENTILATION.** Every sleeping room shall be provided with ventilation in accordance with one of the following:

(a) Windows or skylights with an openable area not less than 4% of the floor area served and located within the sleeping room; or

(b) Mechanical ventilation as specified in s. Ind 64.58 (2) and provided with an emergency source of power.

History: Cr. Register, December, 1981, No. 312, eff. 1-1-82; am. (1), Register, October, 1982, No. 322, eff. 11-1-82.

**Ind 58.46 Size of sleeping rooms.** Every sleeping room shall provide at least 400 cubic feet of space for each occupant.

History: Cr. Register, December, 1981, No. 312, eff. 1-1-82.

**Ind 58.47 Sleeping rooms below grade.** All buildings having sleeping rooms below grade shall be designed and constructed to prevent penetration or collection of moisture within occupied spaces.

History: Cr. Register, December, 1981, No. 312, eff. 1-1-82.

## MEANS OF EGRESS REQUIREMENTS

**Ind 58.48 Required means of egress.** (1) **GENERAL REQUIREMENTS.** All required means of egress doors shall comply with s. Ind 51.15, except as modified in this section and s. Ind 58.59.

Register, October, 1982, No. 322  
Building and heating, ventilating  
and air conditioning

(2) **DOORS IN MEANS OF EGRESS.** (a) Doors in a means of egress may be of the horizontal sliding type, providing the force to slide the door to its fully open position does not exceed 37 pounds.

(b) A door which serves an area with a capacity not more than 25 persons is not required to open in the direction of egress.

(3) **EXIT DISCHARGE.** Exit discharge may terminate at one of the following:

(a) Directly at the exterior of the building;

(b) At a horizontal exit; or

(c) Into a fenced or walled court, provided that not more than 2 walls of the court are the walls of the building from which exit is being made. Enclosed yards or courts shall be sized to accommodate all occupants, a minimum of 30 feet from the building with a net area of 15 square feet per person. Access from the fenced or walled court to the public thoroughfare may be fenced and locked.

(4) **EXIT ACCESS.** A dayroom may serve as a portion of the exit access from a sleeping room.

**History:** Cr. Register, December, 1981, No. 312, eff. 1-1-82.

**Ind 58.49 Exit doors, number and type of exits.** (1) **NUMBER.** At least 2 exits shall be accessible from each floor of the building and shall be located such that in case any exit is blocked, some other exit will still be accessible.

(2) **EXIT DOORS.** All exit doors shall be at least 36 inches in width.

(3) **EXIT ACCESS DOORS.** All exit access doors shall be at least 36 inches in width, except for the following modifications:

(a) Doors to sleeping rooms shall be at least 28 inches in width;

(b) Doors to sleeping rooms designated for use by the physically disabled shall be at least 32 inches in width; or

(c) Doors to dayrooms shall be at least 32 inches in width.

(4) **TYPE OF EXITS.** (a) Required exits shall be by a door leading directly to a stairway, smokeproof tower, ramp, horizontal exit, exit passageway or outside the building as specified in this subchapter. No more than one-half of the required exits may be horizontal exits.

(b) Where a detention or correctional facility, other than a hospital or nursing home, is located on the upper floors of a building having a different occupancy, at least one of the exits from the detention or correctional facility shall be a separate smokeproof tower as specified in s. Ind 51.17. The smokeproof tower shall serve only the detention or correctional facility and there shall be no doors opening into the smokeproof tower from any other occupancy of the building.

**History:** Cr. Register, December, 1981, No. 312, eff. 1-1-82.

Register, October, 1982, No. 322  
Building and heating, ventilating  
and air conditioning

**Ind 58.50 Stairways.** All stairways shall comply with the requirements specified in s. Ind 51.16 and shall be enclosed as specified in s. Ind 51.18.

**History:** Cr. Register, December, 1981, No. 312, eff. 1-1-82.

**Ind 58.51 Smokeproof towers.** Smokeproof stair towers shall comply with the requirements specified in ss. Ind 51.17 and 58.48.

**History:** Cr. Register, December, 1981, No. 312, eff. 1-1-82.

**Ind 58.52 Horizontal exits.** (1) **GENERAL.** Horizontal exits shall comply with the requirements in s. Ind 51.19, except as modified in this section.

(2) **AREA.** At least 6 net square feet of accessible space per occupant shall be provided on each side of the horizontal exit for the total number of people in the adjoining compartment.

(3) **DOORS.** (a) A single door used as a horizontal exit shall serve one direction only, be at least 36 inches wide and swing in the direction of egress.

(b) Horizontal exit doors may be locked as specified in s. Ind 58.59.

**Next page is numbered 233**